


PNEUMATIC PUNCH

For punching feed holes on braille plates. Two-hand operation for maximum safety. Plates are introduced manually into the central insertion slot.

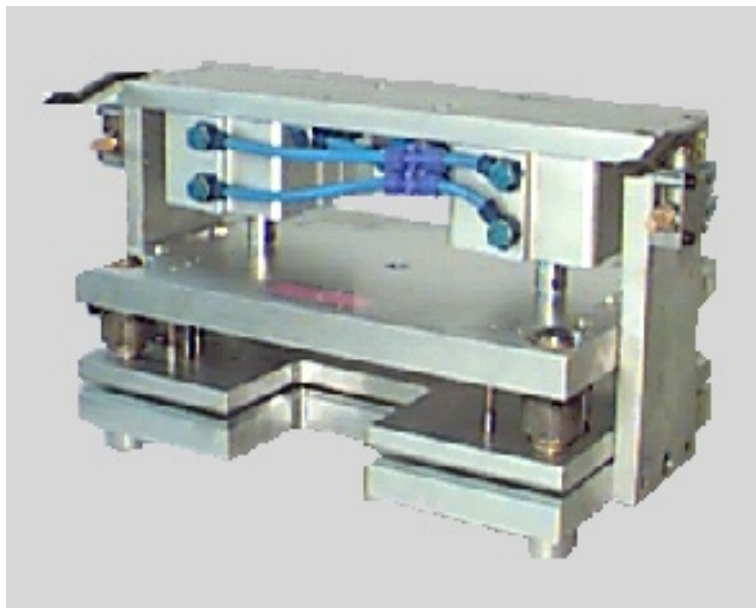

Technical Specifications

Max. 10 holing pins
Pneumatic connection to 6 bar standard line or via compressor
Compressor connection: 220/240V, 16A fuse
Width 450 mm
Length 300 mm
Height 250 mm

ordering no.: 00-55002